


CCR-K100

RFID Reader

Contactless Card Reader

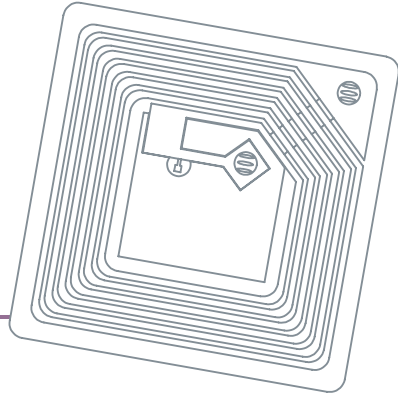

RFID (Radio Frequency Identification)



ISO14443A / ISO14443B / ISO15693 Protocol Support



NXP(Philips) Mifare Function Support



TCP/IP Ethernet Data Communication Support



Standard Wiegand Data Output Support




RS-422/485 Multi Drop Communication Support



RS-232 Serial Port Communication Support

RFID Reader

Contactless Card Reader

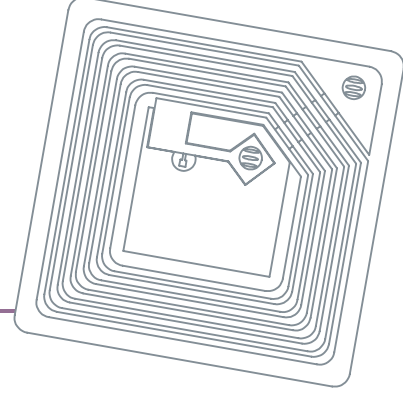

Specifications

Input Voltage	DC12V	Read Range	Up to 5Cm
Input Current	100mA (typical)	Material	ABS Plastic
Frequency	13.56 Mhz	Weight	130g
Modulation	ASK	Color	Black
Operation Temperature Range	-10 °c ~ +65 °c	Indicator	Blue/Red RingLED, Buzzer

Data Communication

Wiegand	Two Wire Opencollector Signal for Access Controller
RS-232	1:1 Serial Communication
RS-422/485	1:n Multi Drop Communication
TCP/IP	TCP Server / Client Bidirectional Data Protocol

Dimension

