



H608A Product Show



Functions & Features


- 1、 Reasonable and reliable design, low noise, smooth operation and long service life ;
- 2、 With function of opening doors automatically under power-off state to meet the need of fire-fighting passage ;
- 3、 With functions of anti-tail, anti-reverse pass and so on;
- 4、 Card can be set "with memory" or "without memory" functions;
- 5、 With automatic reset function, i.e. after having access to the gate, the gate automatically restores to the locked state if not pass within the time set;
- 6、 With infrared anti-clip function (anti-clip when gate is open or running);
- 7、 Compatible with IC, ID card, scanning and face recognition,etc.

- 8、Two modes of operation are available: open or closed.
- 9、Various working modes are available, including two-way card reading and one-way card reading, etc.



Parameter

Material	12mm black marble+1.2mm SUS304
Size	1400*300*980mm
Sensor pairs	5 pairs
Pass rate	35p/m
Pass width	550mm
Input voltage	100V~240V
Motor type	DC brush motor
Environment	-20~+70°C
Power supply	24V 150W
Net weight	95kg

Product

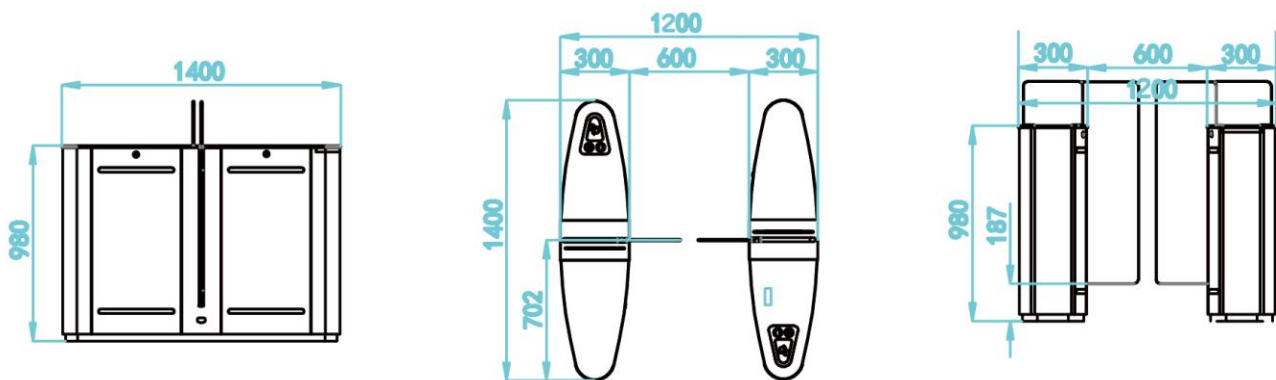

Case share

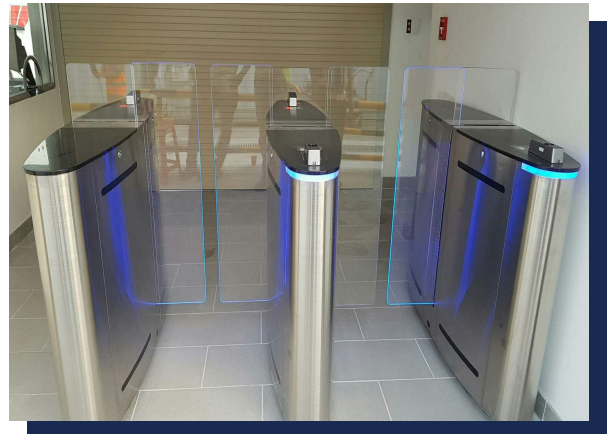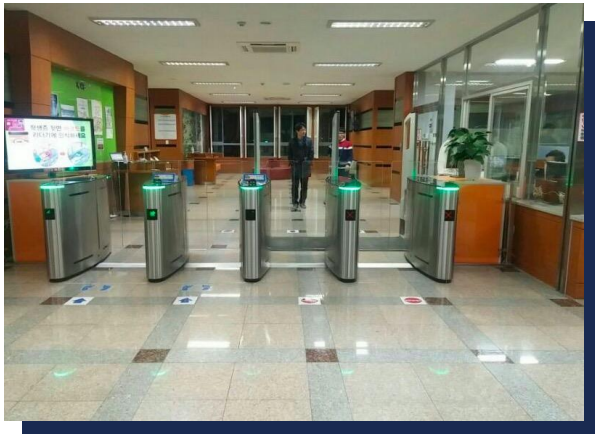

Turboo Automation Co.,Ltd

**Scan our QR
code to follow**



Official Accounts