

CIRCULAR POLARIZED UHF ANTENNA SlimLine - B6031

ABOUT TIMES-7

Pushing the boundaries of RFID technology worldwide Times-7 are leaders in RFID antenna design and manufacture. Our patented award winning UHF antennas meet the needs of virtually any industry application; providing customers with fast accurate tracking of products, assets & people; empowering organizations to transform processes & reduce costs.

Our SlimLine range of antennas is unique in the RFID industry; offering high levels of performance & durability in an aesthetically superior form. Proven in a diverse & growing range of markets, applications include: retail & customer interaction, conference & people tracking, race timing, baggage handling, and logistic & supply chain asset management.

Times-7 Research 29 Railway Avenue Lower Hutt 5010 New Zealand

NEW ZEALAND P: +64 4 974 6566

USA/CANADA P: +1 408 769 5025

E: info@times-7.com

www.times-7.com



Up to 4 m / 13 ft. read range

Just 8 mm / 0.3 in. thick

Sleek & rugged design, with customer friendly aesthetics

Typical applications: Retail, office, industry / any space constrained or customer facing environment

The SlimLine B6031

Part of the SlimLine range of multi-purpose antennas, the B6031 is an ultra-low profile circularly polarized flat panel antenna for UHF RFID applications in customer facing or space conscious environments. With a 4 m / 13 ft. read range, the B6031 is similar in size and weight to a Tablet PC and can easily blend into any office or retail environment.

Specifications

Physical / Environmental Specifications

Dimensions (L x W x D):	275 mm x 214 mm x 8 mm	
	10.8 " x 8.5 " x 0.3 "	
Weight:	0.5 kg / 1.1 lbs	
Radome Material:	Fire retardant ABS	
Environmental Rating:	IP54	
Operating / Storage Temperature:	-20° to +55°C / -30° to +65°C	
	-4° to +131°F / -22° to +149°F	
Mounting:	Integrated mounting holes / Universal mounting	
	brackets for rack (VESA) mounting available	
Connector Cable type / position:	SMA female 195 side fly lead (300 mm / 1 ft.)	

Electrical Specifications


Frequency Range (ETSI/FCC):	865 – 868 MHz / 902 – 928 MHz		
	003 - 000 Wil 12 / 902 - 920 Wil 12		
Polarization:	RHCP (Right Hand Circular Polarized)		
Far-field Gain:	5 dBiC typical		
Far-field 3 dB beamwidth:	60° vertical, 80° horizontal		
VSWR:	1.4 typical		
Front to back ratio:	-15 dB		
Axial ratio:	2 dB typical		
Nominal Impedance:	50 Ω		
Anti-static protection:	DC grounded		
Antenna Detection:	10 K Ω resistance		
Maximum Input Power:	3 W		





CIRCULAR POLARIZED UHF ANTENNA SlimLine - B6031

E-field elevation & Azimuth Patterns

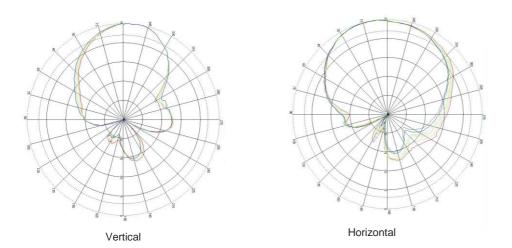

OUR GLOBAL NETWORK

Constantly increasing market reach and influence in the global RFID industry, Times-7's international support spans The Americas, Europe, and Asia Pacific regions through our distributor, authorized reseller and integrated solutions provider network.

Ordering Information (please quote both product code & part no.)

Product Code	Band	Part No.
B6031	ETSI 865-868 MHz	71828
B6031	FCC 902-928 MHz	71827

Applications

- Retail inventory management
- Office asset tracking
- Any space constrained / customer facing environment







The technical data contained in this publication is not a guarantee for which Times-7 Research Ltd assumes legal accountability. It is indicative of typical performance, and if required should be relied on for specific applications only after due verification.

All technical data, specifications and other information contained herein are deemed to be the proprietary intellectual property of Times-7 Research Ltd. No reproduction, copy or use thereof may be made without the express written consent of Times-7 Research Ltd. Times-7 Research Ltd 29 Railway Avenue Lower Hutt 5010 New Zealand

> NEW ZEALAND P: +64 4 974 6566

USA/CANADA P: +1 408 769 5025

E: info@times-7.com

www.times-7.com



Times-7, and the stylized T-7 Antennas logo are trademarks or registered trademarks of Times-7 Research Ltd. All other trademarks are the property of their respective owners. © 2019 Times-7 Research Ltd. All rights reserved. Specifications are subject to change without notice. Datasheet v1.6