



Long Range UHF RFID Reader And Writer

PK-UHF101 / PK-UHF201



PK-UHF101

PK-UHF101-1

PK-UHF201
PK-UHF201-1

Introduction

- PK-UHF101 / PK-UHF201 is one of high-performance UHF frequency reader, combining proprietary signal processing algorithms and efficient, with a high recognition rate processing performance and fast read and write, can be widely used in logistics, parking systems, access control systems, security systems and production process control, and other radio frequency identification(RFID) systems.


Features

- Protocol comply with UHF EPC Gen2(ISO18000-6C), ISO 18000-6B standard.
- Working frequency 902~928MHz(PK-UHF101 / PK-UHF201) / 865~868MHz(PK-UHF101-1 / PK-UHF201-1)
- Support adjustable frequency range (FHSS) or fixed specific working frequency.
- Power output 0-30dBm (adjustable)
- Built-in 8dBi/12dBi polarized antenna as choice : Reading range 5~8M / 15M.
- Support operation Modes as Answer, Active, Trigger mode.
- Low power design, Input Power: DC +9V.
- Support RS-232, RS-485, Wiegand 26/34 Interface.

Specifications

Model No.	PK-UHF101	PK-UHF101-1	PK-UHF201	PK-UHF201-1
Dimension	230 x 230 x 57mm	255 x 255 x 35mm	445 x 445 x 55mm	
Net Weight	900g	900g	2600g	
Gross Weight	1700g	2210g	5000g	
Protocol	ISO18000-6B, EPC Class 1 Gen2(ISO18000-6C)			
Protection Grade	IP54			
Work Frequency	Standard ISM 902~928MHz(PK-UHF101 / PK-UHF201)(ANSI Standard), 865-868MHz(PK-UHF101-1 / PK-UHF201-1)(British Standard)			
Frequency Hopping	FHSS			
Power Output	0-30dBm(adjustable)			
Antenna	Built-in 8dBi linearized polarized antenna		Built-in 12dBi linearized polarized antenna	
Interface	RS232, RS485, wiegand 26/34(TCP/IP,Wifi can be customized)			
Operating Mode	Answer,Active,Trigger			
Read Range	5~8m		3~15m	
Reading Speed	10ms / tag			
Reading Clue	Buzzer			
Input Power	100-240V,DC+9V (Power Adapter)			
Operation Temp	-20°C~+70°C			
Storage Temp	-25°C~+80°C			
Humidity	80%			
Regulatory	Compliant with CE,FCC			
Additional services	Provide Demonstration software and SDK(VC, VB, C#, VB.NET, C++) for further development			

Configurations

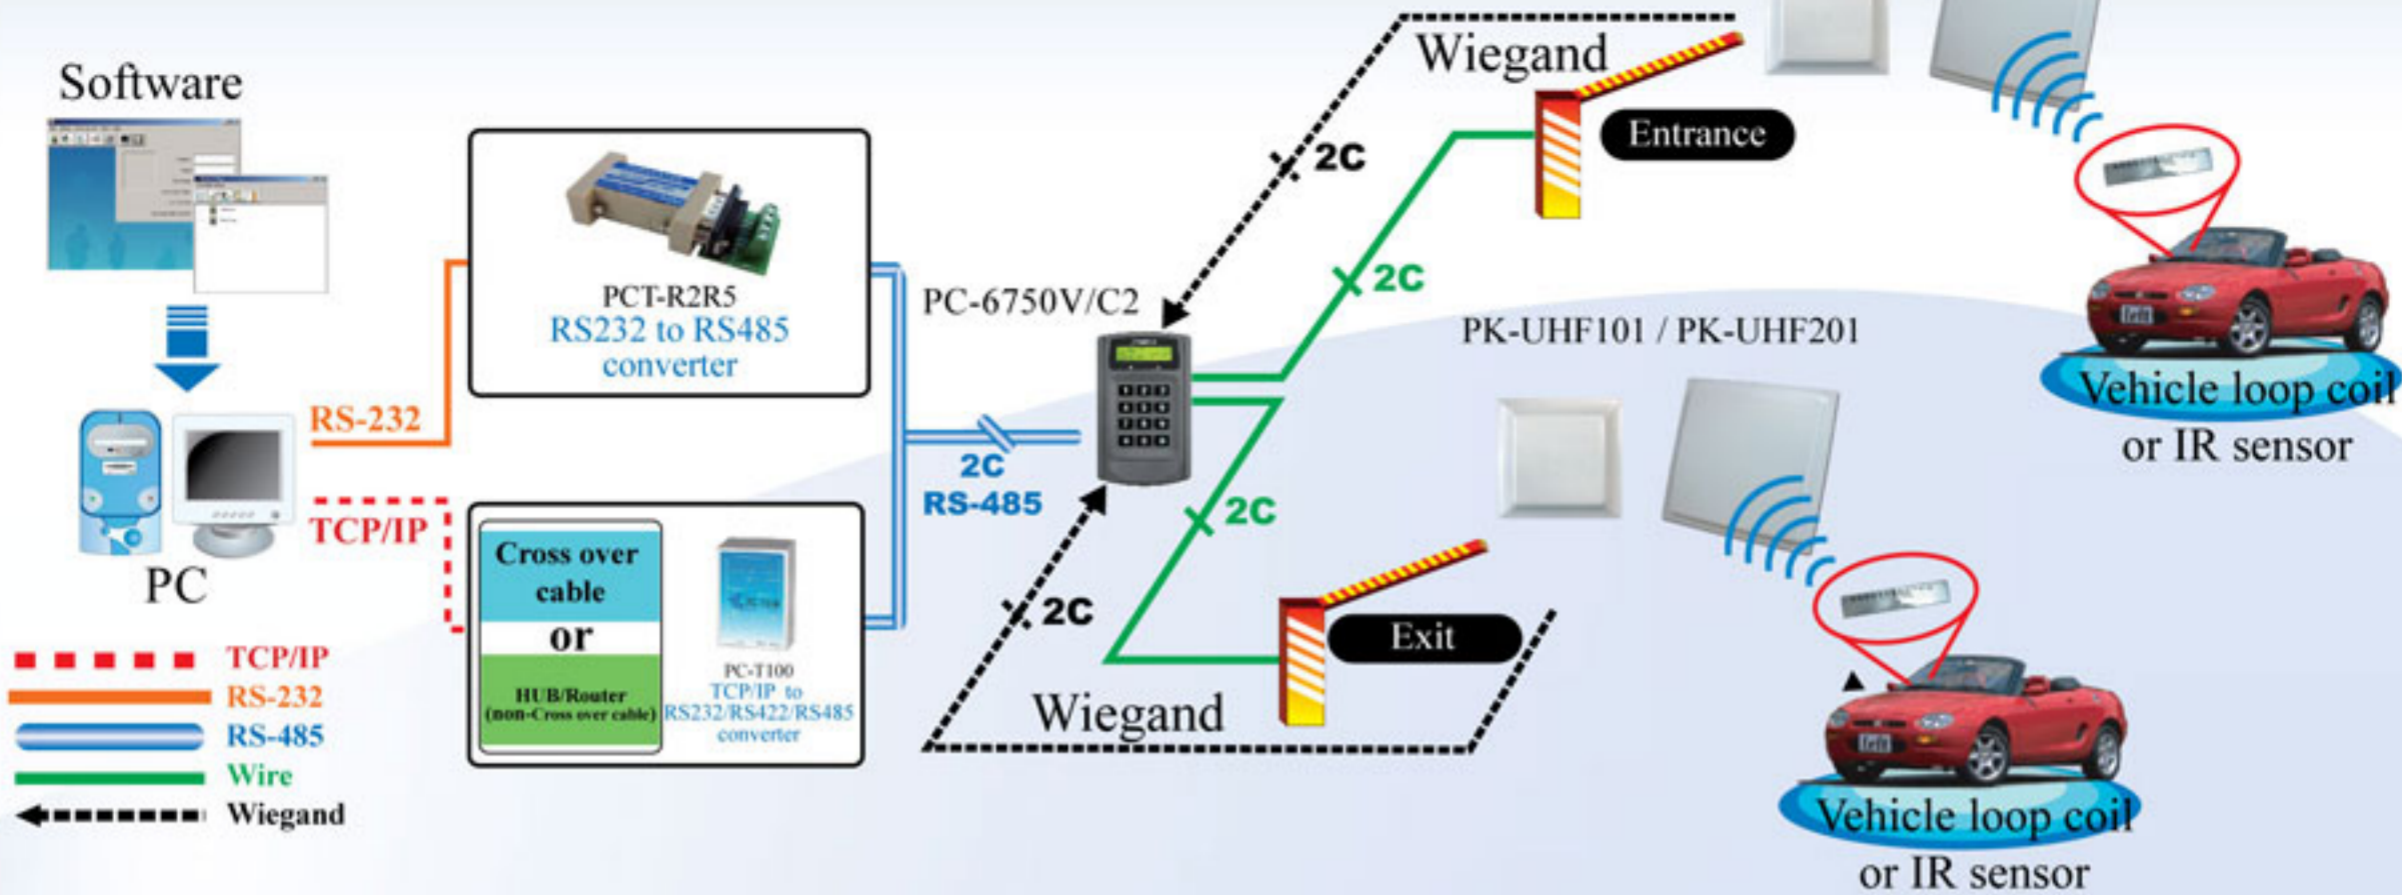

Optional Accessory

◆ USB type portable reader support easier ID number collection & registration for access control system.



UHF Tag

<p>UHF adhesive label (Transparent) PG-PROXL-6C-B2 Dimension: 105 x 6.5 mm Operating Range: 12m (Depending on antenna /reader)</p>	<p>UHF adhesive label (Silver) PG-PROXL-6C-1-W1 Dimension: 96 x 22 mm Operating Range: 10m (Depending on antenna /reader)</p>	<p>UHF adhesive label (Transparent) PG-PROXL-6C-UHF-B1 Dimension: 97 x 15 mm Operating Range: 9m (Depending on antenna /reader)</p>	
<p>UHF adhesive label (Vehicle anti-dismantle tag) PG-PROXL-UHF-6C-A-B1 Dimension: 110x45 mm Operating Range: 15m (Depending on antenna /reader)</p>	<p>UHF card PG-PROXC-UHF-B1 Dimension: 85x54x1 mm Operating Range: 15m (Depending on antenna /reader)</p>	<p>UHF adhesive label (Transparent) PG-PROXL-UHF-A Dimension: 73x21 mm Operating Range: 9~12m (Depending on antenna /reader)</p>	<p>UHF adhesive label PG-PROXL-UHF-B Dimension: 74x23 mm Operating Range: 9~12m (Depending on antenna /reader)</p>

PONGEE INDUSTRIES CO., LTD.

5F., No.738, Chung-Cheng Rd., Chung-Ho District, New Taipei City 23511, Taiwan
 Tel : 886-2-82280198 Fax : 886-2-82280191
 E-mail : pongee@pongee.com.tw Website: http://www.pongee.com
 We reserve the right to change the specification without prior notice or obligation!

